



#### **WELD SIDE TRIMMER UNIT**




 $\epsilon$ 

The Weld Side Trimmer Unit ensures a high-quality surface by cutting the edges of weld seams after the welding process.

This operation not only enhances the durability and appearance of rims but also improves the effectiveness and efficiency of the production line. The machine's automatic and precise cutting capabilities are crucial for maintaining consistent quality throughout the production process.

The Weld Side Trimmer Unit provides a clean and precise surface by cutting the edges of weld seams in steel rim production.

This unit is an indispensable component of rim manufacturing processes, enhancing both the structural integrity and aesthetic quality of the rims.

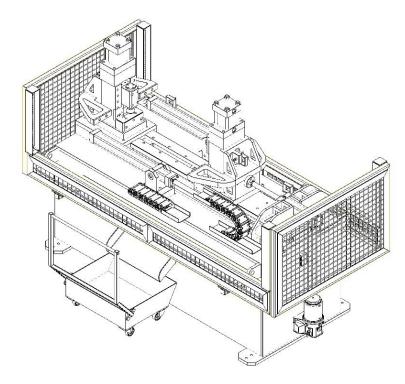

- Precision Cutting: The machine ensures smooth and even surfaces by cutting the edges of weld seams.
- <u>Adjustable Cutting Settings: Capable of adjustment to accommodate different rim widths and steel thicknesses.</u>
- <u>Durable Construction: Made from high-quality materials to withstand the challenges of continuous operation in industrial environments.</u>
- <u>User-Friendly Interface:</u> Features an easy-to-use control panel for quick adjustments and monitoring of the cutting process.

#### **Benefits**

- Enhanced Product Quality: Produces clean and smooth edges on weld seams, improving the overall quality and durability of rims.
- Increased Efficiency: Automation and precise cutting capabilities significantly reduce production time and boost efficiency.
- Cost Savings: Lowers operational costs by reducing manual labor and eliminating the need for rework.
- Versatility: Provides a flexible solution for various production needs by accommodating different types and thicknesses of steel.
  - Safe Working Environment: Minimizes manual intervention, creating a safer working environment.



No.	Specifications	Forklift	Agricultural	Agricultural and Truck	Agricultural and Heavy Vehichle
1	Rim diameter range (inch)	8 to 15	12 to 20	15 to 24	20 to 58
2	Rim band width ( inch )	3 to 10	4 to 16	4 to 16	6 to 36
3	Rim band thickness ( mm )	≤8	≤5	≤8	≤ 10
4	Capacity ( Operation Time - sec. )	8	10	10	15
5	Loading - Unloading	Optional	Optional	Optional	Optional

Yazıbaşı Mah. 304 sk. No. 2/1, Torbalı, İzmir/Türkiye Telephone: +90 232 887 1 333

E-Mail: info@ihsas.comtr Internet: wwwihsas.comtr





### WELD SIDE TRIMMER UNIT







# ABOUT İHSAŞ

ESTABLISHED IN 2018 IN IZMIR/TURKEY WITH STRONG ENGINEERING/DESIGN CAPABILITIES IN ORDER TO CARRY ON A BUSINESS IN WHEEL MANUFACTURING LINES AND AVIATION INDUSTRY.

HSAŞ MEETS THE REQUIREMENTS OF MANUFACTURERS IN THE WHEEL MANUFACTURING INDUSTRY WITHOUT ANY COMPROMISE IN PARALLEL WITH ISO9001:2008.

IN ADDITION TOO BUILDING WHEEL MANUFACTURING LINES, İHSAŞ IS ABLE TO PRODUCE ALL MOLD APPARATUS AND INTERMEDIATE MACHINERY FOR PROCESSES ACCORDING TO NEED.

İHSAŞ ESTABLISHES LONG-TERM RELATIONSHIPS WITH CUSTOMERS AND CUSTOMER SATISFUCTION IS AT THE FOREFRONT.

# OUR VISION

TO CREATE AN UNRIVALED BRAND FOR TURKEY AND MOREOVER, GROWING WITH DETERMINED STEPS AS GLOBALLY.

### OUR MISSION

TO BE A PREFFERED SUPPLIER FOR CUSTOMERS.

TO CREATE A PERMAMENT COOPERATION IN EXIST.





























